

MAINWIRELESSNETWORKADVANCEDSERVICESSYSTEM

Tools:

▼

Logout

airMAX Settings:

airMAX: [?] ☒ EnableLong Range PtP Link Mode: [?] ☐



airView

airView Port: [?] 18888Launch airView [?]

airSelect

airSelect: [?] ☐ Enable

Change

 GENUINE  PRODUCT

© Copyright 2006-2016 Ubiquiti Networks, Inc.


Status

Device Model:	Rocket M5	AP MAC:	FC:EC:DA:2C:5B:6D
Device Name:	Rocket M5	Connections:	1
Network Mode:	Bridge	Noise Floor:	-103 dBm
Wireless Mode:	Access Point	Transmit CCQ:	99.2 %
SSID:	NGDU1VIDEOVENATOR	airMAX:	Enabled
Security:	none	airMAX Quality:	99 %
Version:	v5.6.11 (XW)	airMAX Capacity:	99 %
Uptime:	00:33:55	airSelect:	Disabled
Date:	2016-09-30 15:59:49		
Channel/Frequency:	162 / 5810 MHz		
Channel Width:	40 MHz (Upper)		
Frequency Band:	5800 - 5840 MHz		
Distance:	0.1 miles (0.2 km)		
TX/RX Chains:	2X2		
TX Power:	-4 dBm		
Antenna:	AMO-5G10 - 10 dBi		
WLAN0 MAC:	FC:EC:DA:2C:5B:6D		
LAN0 MAC:	FC:EC:DA:2D:5B:6D		
LAN0:	100Mbps-Full		


Monitor

[Throughput](#) | [Stations](#) | [Interfaces](#) | [ARP Table](#) | [Bridge Table](#) | [Routes](#) | [Log](#)

WLAN0

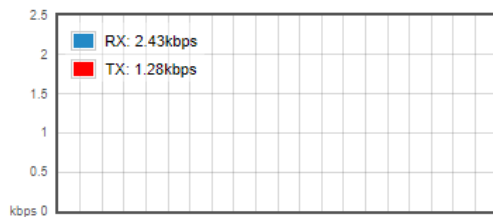

LAN0

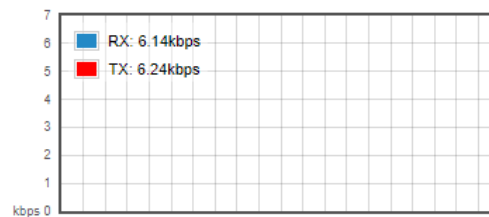

Refresh

Меню

[Rocket M5] - Wireless X [NanoStation loco M5] - U X (19) Входящие - Почта M X Создать тему | Ubiquiti ф X +

Искать в Google поиск

Бронирование отелей Яндекс AliExpress Bonprix Lamoda Facebook Панель закладок Яндекс Авиабилеты Яндекс

rocket M5

airOS™

MAIN WIRELESS NETWORK ADVANCED SERVICES SYSTEM Tools: Logout

Basic Wireless Settings

Wireless Mode: Access Point

WDS (Transparent Bridge Mode): ☐ Enable

SSID: NGDU1VIDEOVENATOR ☐ Hide SSID

Country Code: United States

IEEE 802.11 Mode: A/N mixed

Channel Width: 40 MHz

Frequency, MHz: 5810

Extension Channel: Upper

Frequency List, MHz: ☒ Enable 5810 Edit...

Calculate EIRP Limit: ☒ Enable

Antenna: AMO-5G10 (2x2) - 10 dBi

Output Power: -4 dBm

Data Rate Module: Default

Max TX Rate, Mbps: MCS 15 - 270/300 ☒ Auto

Wireless Security

Security: none

RADIUS MAC Authentication: ☐ Enable

MAC ACL: ☐ Enable

Change

GENUINE PRODUCT

© Copyright 2006-2016 Ubiquiti Networks, Inc.

Скажите «Слушай, Алиса»

18:52 01.12.2018

rocket M5

airOS™



MAIN

WIRELESS

NETWORK

ADVANCED

SERVICES

SYSTEM

Tools:

Logout

Network Role

Network Mode: Bridge

Disable Network: None

Configuration Mode

Configuration Mode: Simple

Management Network Settings

Management IP Address: ☐ DHCP ☒ Static

IP Address: 192.168.1.2

Netmask: 255.255.255.0

Gateway IP: 192.168.1.1

Primary DNS IP:

Secondary DNS IP:

MTU: 1500

Management VLAN: ☐ Enable

Auto IP Aliasing: ☒ Enable

STP: ☐ Enable

IPv6: ☐ Enable

Change



GENUINE PRODUCT

© Copyright 2006-2016 Ubiquiti Networks, Inc.

+

rocket M5

airOS™



MAIN

WIRELESS

NETWORK

ADVANCED

SERVICES

SYSTEM

Tools: ▾

Logout

Advanced Wireless Settings

RTS Threshold: [?] 2346 ☒ Off

Distance: [?] 0.4 miles (0.6 km) ☒ Auto Adjust

Aggregation: [?] 32 Frames 50000 Bytes ☒ Enable

Multicast Data: [?] ☒ Allow

Multicast Enhancement: [?] ☒ Enable

Installer EIRP Control: [?] ☐ Enable

Extra Reporting: [?] ☒ Enable

Client Isolation: [?] ☐ Enable

Sensitivity Threshold, dBm: [?] -96 ☒ Off

Advanced Ethernet Settings

LAN0 Speed: [?] 100Mbps-Full ▾

Signal LED Thresholds

LED1 LED2 LED3 LED4
Thresholds, dBm: [?] - 94 - 80 - 73 - 65

Change



© Copyright 2006-2016 Ubiquiti Networks, Inc.

Ping Watchdog

☐ Enable

IP Address To Ping:

Ping Interval: 300 seconds

Startup Delay: 300 seconds

Failure Count To Reboot: 3

Save Support Info:

SNMP Agent

☐ Enable

SNMP Community: public

Contact:

Location:

Web Server

☒ Enable

Secure Connection (HTTPS): ☒ Enable

Secure Server Port: 443

Server Port: 80

Session Timeout: 15 minutes

SSH Server

☒ Enable

Server Port: 22

Password Authentication: ☒ Enable

Authorized Keys: Edit...

Telnet Server

☐ Enable

Server Port: 23

NTP Client

☐ Enable

NTP Server: 0.ubnt.pool.ntp.org

Dynamic DNS

☐ Enable

Service: dyndns.org

Host Name:

User Name:

Password: Show

System Log

☒ Enable

Remote Log: ☐ Enable

Remote Log IP Address:

Remote Log Port: 514

TCP Protocol: ☐ Enable

Device Discovery

☒ Enable

CDP: ☒ Enable

Change

rocket M5

airOS

MAINWIRELESSNETWORKADVANCEDSERVICESSYSTEMTools:Logout

Firmware Update

Firmware Version: XW.v5.6.11Build Number: 29745

Upload Firmware:Выберите файлФайл не выбран

Check for Updates: ☒ Enable Check Now

Device

Device Name: Rocket M5

Interface Language: English

FCC ID: SWX-R5M

Date Settings

Time Zone: (GMT) Western Europe T

Startup Date: ☐ Enable

Startup Date:

System Accounts

Administrator User Name: ubnt

Read-Only Account: ☐ Enable

Miscellaneous

Reset Button: ☒ Enable

Revised UNII Rules: ☐ Deactivate

Location

Latitude:

Longitude:

Change

Device Maintenance

Reboot Device: Reboot...

Support Info: Download...

Configuration Management

Back Up Configuration: Download...

Upload Configuration:Выберите файлФайл не выбран

Reset to Factory Defaults: Reset...

GENUINE PRODUCT

© Copyright 2006-2016 Ubiquiti Networks, Inc.